

TWOMASTER



TWOMASTER LBS
Load Break Switches
40A-3200A

TWOMASTER LBS

Load Break Switches

40A-3200A

TWOMASTER


The solution for

- Main switchboard
- Distribution panel
- Emergency breaking
- Network coupling
- Local safety breaking

Compliance with standards

- IEC 60947-3
- IEC 60947-1
- GB/T14048.1-2006
- GB/T14048.3-2008

Approvals and certifications

China Quality Certification Centre



Product Description

LBS series isolation switch adopts modular design structure and glass fiber reinforced unsaturated polyester resin casing. It is high dielectric property, protective value and safe operation. The operation mechanism is a spring-accumulating and accelerating instant-release device, which makes instant making and breaking of the double gap contact. It is no relationship with the speed of operation handle. The product have been obtained 3C certificate.

Characteristics

Spring-storage instantaneous release of the mechanism to speed up the realization of the rapid marking and breaking (13.8 m / s), and it is nothing to do with the operation handle speed, and have greatly improved the capability of extinguish electric arc.

The glass fiber reinforced unsaturated polyester resin casing have excellent flame resistance, dielectric, resist carbonic and resist impact performances.

Parallel double gap contact possesses self-cleaning functions

All the contact materials are copper alloy plated with silver, and possess two separation contact surfaces.

Large clearance of insulation.

When it is "0" position, the product can lock the handle with three locks at the same time, and it can avoid error operation.

Operation Environment

Altitude not exceed 2000m

Temperature: -5°C~+ 40°C, Relative humidity not more than 95%

No explosive dangerous medium environment

No rain and snow attack environment

Note: If the load isolation switch is expected to be used in the condition that the ambient temperature is higher than +40°C or is lower than -5°C~45°C, customers should inform to the manufactory

Performance Feature

7 specifications of LBS series load isolation switch from 40A to 3200A is basic model of modularized design type, have 3 poles and four poles (3 poles + on and off neutral pole). It is mainly applied for making and breaking, and switches over 1000A are only suitable for electric isolation

The mark window is in the front to indicate the on and off state.

Two group of auxiliary contacts can be assembled.

The electric cable insulating cover can be assembled.

Product Code

TWOMASTER-LBS Load Break Switch						
Rating (A)	Product Code	No. of poles	Direc Handle	External handle & Shaft	Auxiliary contact	Bridging bars
40	32203004	3 Pole	included	32200001		
	32204004	4 Pole				
63	32203006	3 Pole				
	32204006	4 Pole				
80	32203008	3 Pole				
	32204008	4 Pole				
100	32203010	3 Pole				
	32204010	4 Pole				
125	32203012	3 Pole		32200002		
	32204012	4 Pole				
160	32203016	3 Pole				
	32204016	4 Pole				
200	32203020	3 Pole				
	32204020	4 Pole				
250	32203025	3 Pole				
	32204025	4 Pole				
315	32203031	3 Pole				
	32204031	4 Pole				
400	32203040	3 Pole				
	32204040	4 Pole				
500	32203050	3 Pole				
	32204050	4 Pole				
630	32203063	3 Pole				
	32204063	4 Pole				
800	32203080	3 Pole		32200003	32200011 (1NA/1NK) 32200012 (2NA/2NK)	
	32204080	4 Pole				
1000	32203100	3 Pole				
	32204100	4 Pole				
1250	32203120	3 Pole				
	32204120	4 Pole				
1600	32203160	3 Pole				
	32204160	4 Pole				
2000	32203200	3 Pole				32200200
	32204200	4 Pole				
2500	32203250	3 Pole				32200250
	32204250	4 Pole				
3200	32203320	3 Pole				32200320
	32204320	4 Pole				

TWOMASTER LBS

Load Break Switches

40A-3200A



Technical Parameters

Rated thermal current I _{th}			63A		100A		160A	
Rated current I _{th}			40	63	80	100	125	160
Rated insulation voltage U _i (V)			750	750	750	750	750	750
Dielectric strength (V)			5000	5000	5000	5000	5000	5000
Rated impulse withstand voltage U _{imp} kV (Installed category IV)			6	6	6	6	8	8
Rated working current I _e (A)	380V	AC-21	40	63	80	80	125	160
		AC-22	40	63	80	80	125	160
		AC-23	40	50	80	80	125	160
	690V	AC-21	40	50	80	80	125	160
		AC-22	32	32	50	50	125	160
		AC-23	25	25	40	40	80	80
	220V	DC-21	32	63	80	100	125	125
		DC-22	40	63	80	80	125	125
		DC-23	40	63	63	63	125	125
	440V	DC-21					100	125
		DC-22					100	125
		DC-23					100	125
Motor power P(380V) kW		380V	18.5	25	40	40	63	80
		690V	22	22	33	33	75	75
Rated short-time withstand current I _{cw} (kA Rms) 0.1S/1S			10/5	10/5	10/5	10/5	10/20	10/20
Rated breaking capacity I _{cn} (A Rms) AC23 380V			320	504				
Rated marking capacity I _{cm} (A Rms) AC23 380V			400	630				
Rated short-circuit making I _{cm} (kA)capacity			7.5	7.5				
Mechanical life (operation cycle times)			10000	10000	10000	10000	10000	10000
Electrical life (operation cycle times) Rated voltage U _e =690V		COSΦ=0.95 AC 21	1700	1700	1700	1700	1500	1500
		COSΦ=0.65 AC 22	100	100	100	100	1000	1000
		COSΦ=0.35 AC 23	500	500	500	500	500	500
Operation torque(Nm)			1.2	1.2	1.2	1.2	6.5	6.5
Weight(Kg)		3 poles	0.37	0.37	0.37	0.37	1.3	1.3
		4 poles	0.41	0.41	0.41	0.41	1.5	1.5

Technical Parameters

250A		630A				1600A			3200A		
200	200	315	400	500	630	1000	1250	1600	2000	2500	3200
750	750	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
5000	5000	8000	8000	8000	8000	10000	10000	10000	10000	10000	10000
8	8	12	12	12	12	12	12	12	12	12	12
200	250	315	400	500	630	1000	1250	1600	2000	2500	3200
200	250	315	400	500	630	1000	1250	1600	2000	2000	3200
200	250	315	340	425	536						
200	250	315	400	400	500	1000	1000	1600	2000	2500	2500
160	160	315	315	315	315	800	800	800	1000	1000	1000
100	125	125	125	125	125						
200	250	315	400	500	630	1000	1250	1600	2000	2500	2500
200	250	315	400	400	500	1000	1250	1250	1600	1600	1600
160	200										
160	200	315	400	400	500	1000	1250	1250	2000	2000	2000
160	200	315	400	400	500	1000	1250	1250	1250	1250	1250
160	200	315	400	400	500	1000	1000	1000			
100	132	160	220	280	315	560	560	560	710	710	710
90	110	185	185	185	185	475	475	475	750	750	750
12/30	12/30	45/20	45/20	50/25	50/25	90/50	90/50	90/50	90/50	90/50	90/50
1600	1600	2500	3200	3200	3200						
2000	2000	3150	4000	4000	4000						
17	17	30	30	40	40						
10000	10000	5500	5500	5500	5500	4000	4000	3000	2500	2500	2500
1500	1500	750	750	750	750	600	600	450			
1000	1000	500	500	500	500	400	400	300			
500	500	250	250	250	250	200	200	150			
10	10	14.5	14.5	14.5	14.5	37	37	60	60	60	60
2.2	2.2	4.3	4.3	4.7	4.7	10.5	10.5	16	25.5	25.5	31
2.6	2.6	5.4	5.4	6	6	13	13	20	37.5	37.5	51.5

TWOMASTER LBS



Load Break Switches

40A-3200A




TWOMASTER

Dimensions

- 40A-100A is applied for the circuit making and breaking or electric insulation.
- 40A-100A three poles and four poles (three poles + on and off neutral pole)
- Two groups of auxiliary contacts can be assembled.
- Side operation and outside operation can be assembled.

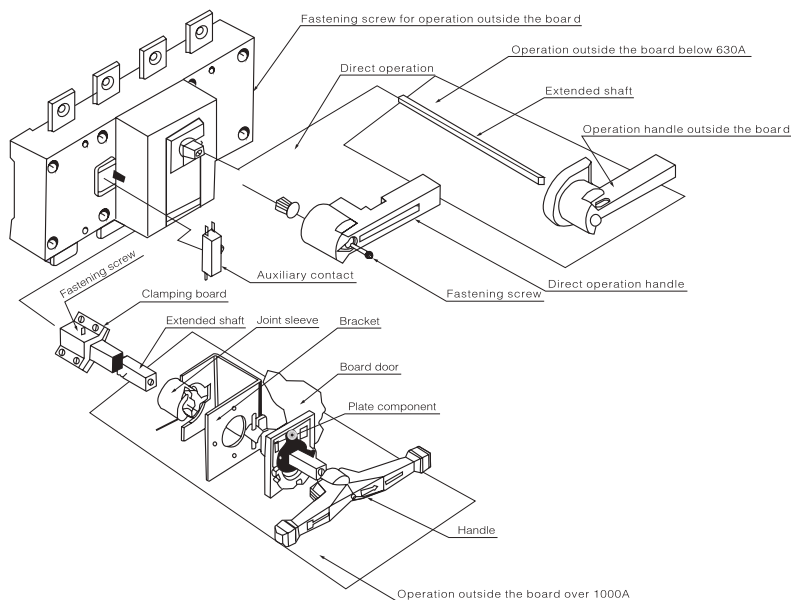
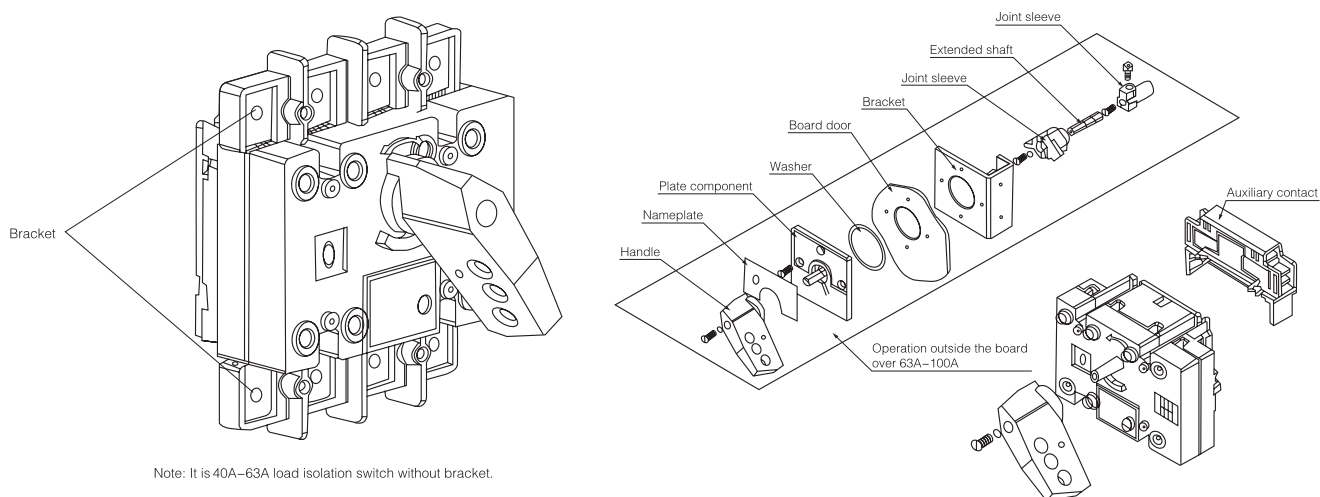


- Direct operation: Handle in the middle position.
- Operation outside: Handle in the outside of the board.





Dimensions

■ LBS-40A Direct operation

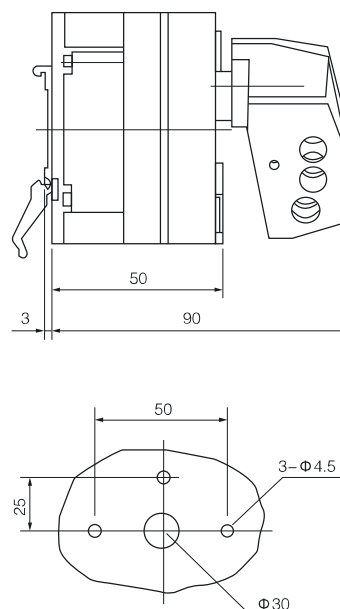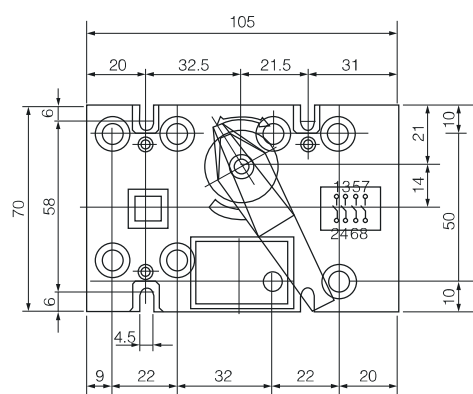

Installation size of operation outside the board

■ LBS-100A Direct operation

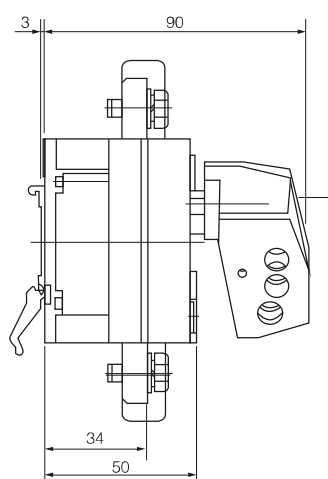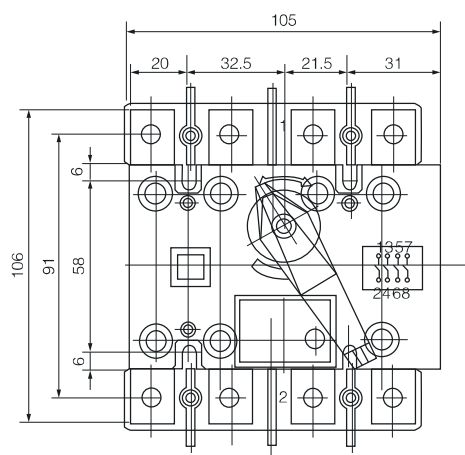


TWOMASTER LBS

Load Break Switches


40A-3200A

TWOMASTER


Dimensions

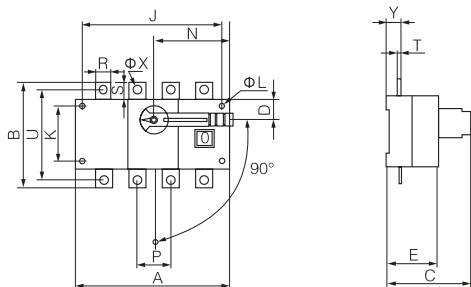


125A-630A Direct operation



Installation size of operation outside board handle




Installation bottom plate for operation outside the board

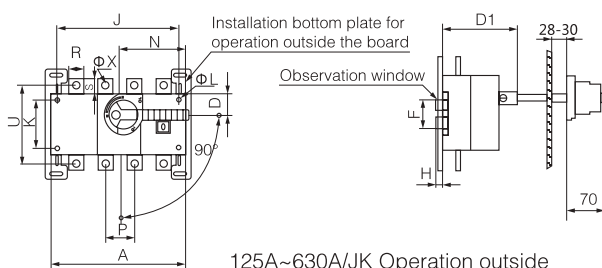






125A-630A/JK Operation outside

Specification	Dimension of bottom plate				
125A~630A	I	M	Z	W	Q
125A	55	5.5	85	190	218
160A	55	5.5	85	190	218
200A	55	5.5	85	190	218
250A	55	5.5	85	190	218
315A	60	6.5	130	240	270
400A	60	6.5	130	240	270
500A	60	6.5	130	240	270
630A	60	6.5	130	240	270




Specification	Overall and mounting dimensions																				
In	A	A1	B	C	D	D1	E	ΦL	J	J1	K	N	P	R	S	T	U	ΦX	Y	F	H
125A/3	140	50	135	92	27	92	73	5.5	120	120	65	85	36	20	25	3.5	85	9	24	52	10
125A/4	170	50	135	92	27	92	73	5.5	150	150	65	85	36	20	25	3.5	85	9	24	52	10
160A/3	140	50	135	92	27	92	73	5.5	120	120	65	85	36	20	25	3.5	85	9	24	52	10
160A/4	170	50	135	92	27	92	73	5.5	150	150	65	85	36	20	25	3.5	85	9	24	52	10
200A/3	180	60	170	103	35	104	83	5.5	160	160	90	115	50	25	30	3.5	110	11	25	79	13
200A/4	230	60	170	103	35	104	83	5.5	210	210	90	115	50	25	30	3.5	110	11	25	79	13
250A/3	180	60	170	103	35	104	83	5.5	160	160	90	115	50	25	30	3.5	110	11	25	79	13
250A/4	230	60	170	103	35	104	83	5.5	210	210	90	115	50	25	30	3.5	110	11	25	79	13
315A/3	230	85	240	134	50	133	113	7	210	210	140	145	65	30	40	5	160	11	36	100	24
315A/4	290	85	240	134	50	133	113	7	270	270	140	145	65	30	40	5	160	11	36	100	24
400A/3	230	85	240	134	50	133	113	7	210	210	140	145	65	30	40	5	160	11	36	100	24
400A/4	290	85	240	134	50	133	113	7	270	270	140	145	65	30	40	5	160	11	36	100	24
500A/3	230	85	260	134	50	133	113	7	210	210	140	145	65	40	50	6	160	12	36	100	24
500A/4	290	85	260	134	50	133	113	7	270	270	140	145	65	40	50	6	160	12	36	100	24
630A/3	230	85	260	134	50	133	113	7	210	210	140	145	65	40	50	6	160	12	36	100	24
630A/4	290	85	260	134	50	133	113	7	270	270	140	145	65	40	50	6	160	12	36	100	24

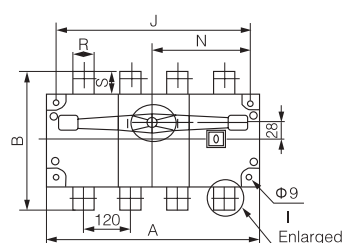Dimensions



1000A - 1600A Direct operation


 Installation bottom
 plate for operation
 outside the board


3200A Direct operation (operation outside)


 Installation bottom plate for
 operation outside the board

 Installation size of
 operation outside


1000A



1250A-1600A

Specification	Overall and mounting dimensions																	
In	A	A1	B	D	E	F	G	J	J1	N	R	S	T	U	Y	Y1	Y2	Q
1000A/3	378	105	312					353	353	186	60	68	8	200	48			311
1000A/4	492	105	312					467	467	246	60	68	8	200	48			311
1250A/3	378	105	338	20	40	16	35	353	353	186	80	68	8	200	48			311
1250A/4	492	105	338	20	40	16	35	467	467	246	80	68	8	200	48			311
1600A/3	378	105	338	20	40	16	35	353	353	186	80	68	10	200	49			311
1600A/4	492	105	338	20	40	16	35	467	467	246	80	68	10	200	49			311
2000A/3	378		455	20	40	20	40	353	353	186	80	68	10	200		75.5	227.5	311
2000A/4	492		455	20	40	20	40	467	467	246	80	68	10	200		75.5	227.5	311
2500A/3	378		455	20	40	20	40	353	353	186	80	68	10	200		75.5	227.5	311
2500A/4	492		455	20	40	20	40	467	467	246	80	68	10	200		75.5	227.5	311
3200A/3	378		505	25	50	25	50	353	353	186	100	68	14	200		78	230	311
3200A/4	492		505	25	50	25	50	467	467	246	100	68	14	200		78	230	311

