

TWOMASTER



TWOMASTER PS SERIES 60W-480W

TWOMASTER PS SERIES

60W-480W

TWOMASTER


The solution for

- Industrial applications
- DC Transmission
- DC Cabinet
- Power distribution board
- Telecommunications base station
- Machine automation

Description

Metal Case for for industrial applications.

Slim design.

Compliant with EMC EN55022

Industrial type, DIN rail mounting

Short circuit, overload, high voltage and high temperature protection

Product Code

TWOMASTER PS SERIES POWER SUPPLY				
Rating (A)	Product Code	Output Voltage	DIN Rail Case	Power (W)
2,5	61006024	24VDC	Plastic	60
3,1	61107524	24VDC	Metal	75
5	61112024	24VDC	Metal	120
10	61124024	24VDC	Metal	240
20	61148024	24VDC	Metal	480

TWOMASTER PS SERIES
60W-480W




Product Parameter

Reference	Power	Input Voltage	Output Voltage	Max. Output Current	Overload Protection	Operating Temperature	Weight
61006024	60W	85-264VAC	24VDC	2,5A	%105 ~ %150	-20°C ~ +50°C	0,30kg
61107524	75W	90-264VAC	24VDC	3,1A	%105 ~ %130	-20°C ~ +50°C	0,51kg
61112024	120W	90-264VAC	24VDC	5,0A	%105 ~ %130	-20°C ~ +50°C	0,60kg
61124024	240W	90-264VAC	24VDC	10,0A	%105 ~ %130	-20°C ~ +50°C	1,00kg
61148024	480W	90-264VAC	24VDC	20,0A	%105 ~ %130	-20°C ~ +50°C	2,00kg

Note :

Shot off o/p voltage, after the restart recovery.
Over load production , %105 - %150 constant current mode, recovery.

Dimensions

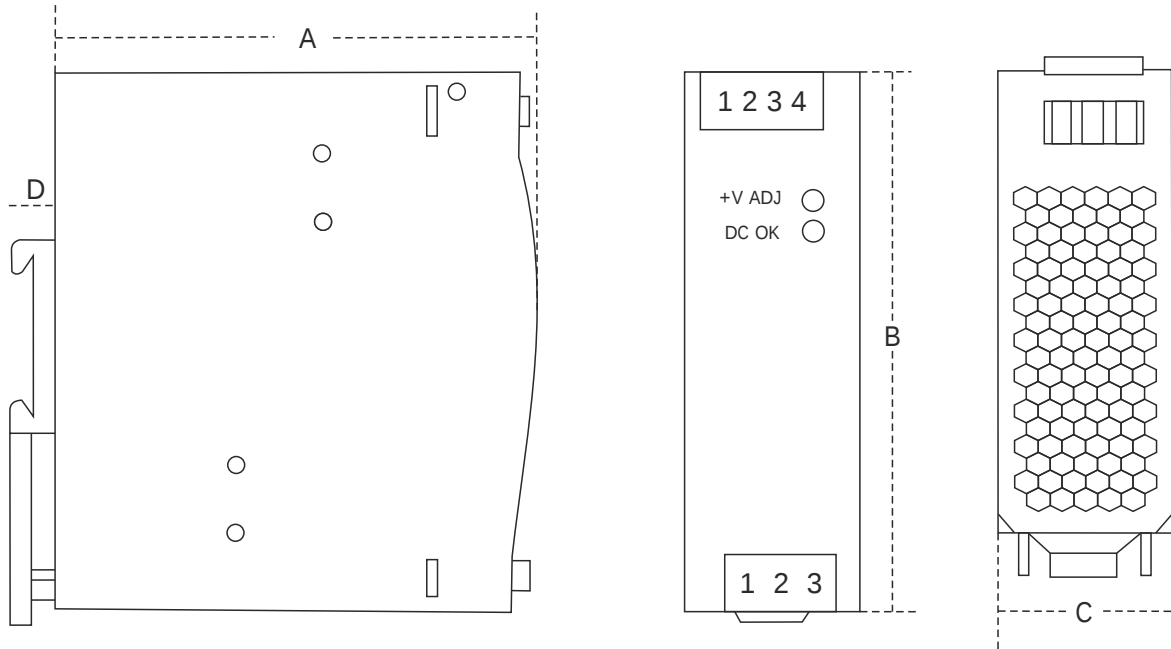

Referans	A	B	C	D
61006024	100	90	40	10
61107524	102	125,2	32	10
61112024	113,5	125,2	40	10
61124024	113,5	125,2	63	10
61148024	100	125,2	125,5	10

